



**EFFECTIVE FROM
JANUARY 2024**

EXPORT CATALOGUE

C-LINE

**LIFTING EQUIPMENT
AND ORIGINAL ACCESSORIES**

REL. MAY 2024

COLOR TABLE

1) The standard company colour of our equipment is blue RAL 5015 (□ /25 or □ /26 Orange peel) and grey RAL 7016 (orange peel) for ramps, arms and all parts subject to wear and tear.

2) On demand other colours are available (see RAL table)*.

• Below the table for the other colors:

	→/25	RAL 5015	Blue sky
	→/A4	RAL 5011	Blue (Peugeot)
	→/22	RAL 5011	Blue (Peugeot) orange-peel
	→/16	RAL 3002	Red
	→/45	RAL 1003	Yellow (Renault)
	→/38	RAL 7042	Grey (Renault)
	→/39	RAL 7040	Window grey (Volkswagen / Porsche / Fiat)
	→/33	RAL 7011	Grey (Mercedes)
	→/65	RAL 7012	Grey (Mercedes)
	→/52	RAL 7015	Grey (Mercedes)
	→/69	RAL 7030	Stone grey (Ferrari / Maserati)
	→/34	RAL 7016	Anthracite grey (BMW)

• Different colors subject to confirmation of the Export dept.

* : The equipment in different color than standard can be subject to surcharge.

ATTENTION!: The customisation kit is compulsory and must be always ordered together with the part-number of the selected lift.

The pictures included in the present illustrated catalogue, are only intended to show the product and are therefore not binding. The company reserves the right to make in every moment and without prior notice, any modification deemed necessary.

NEXION S.p.A. declines any responsibility for any complaint coming from the use of not original accessories or spares with consequent forfeiture of the CE conformity declaration.


TABLE OF CONTENTS

ELECTRO-HYDRAULIC TWO POST LIFTS	4
P2C 255C	4
P2C 245C	5
P2C 245C B	7
P2C 235C B	8
COMPULSORY ACCESSORIES FOR P2C 245C B - P2C 235C B	9
OPTIONAL ACCESSORIES FOR P2C 245C B - P2C 235C B	9
ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS	10
SUPERLIFT 36-1XC B	10
SUPERLIFT 32-1XC B	11
COMPULSORY ACCESSORIES FOR SUPERLIFT 36-1XC B - 32-1XC B	12
OPTIONAL ACCESSORIES FOR SUPERLIFT 36-1XC B - 32-1XC B	12
LOW PROFILE DOUBLE SCISSORS LIFTS	14
SUPERLIFT 32-2XC EF	14
SUPERLIFT 36-2XC EF	15
COMPULSORY ACCESSORIES FOR SUPERLIFT 32-2XC EF - 36-2XC EF	16
OPTIONAL ACCESSORIES FOR SUPERLIFT 32-2XC EF - 36-2XC EF	16
HIGH PROFILE DOUBLE SCISSORS LIFTS	18
SUPERLIFT 36-2STC E	18
SUPERLIFT 36-2STC E	19
COMPULSORY ACCESSORIES FOR SUPERLIFT 36-2STC E - 40-2STC E	20
OPTIONAL ACCESSORIES FOR SUPERLIFT 36-2STC E - 40-2STC E	20
LOW PROFILE PLATFORM SCISSORS LIFTS	22
SUPERLIFT 55/XC CT LT	22
SUPERLIFT 55/XC CT	23
SUPERLIFT 55/XC	24
SUPERLIFT 45/XC CT LT	25
SUPERLIFT 45/XC CT	26
SUPERLIFT 45/XC	27
OPTIONAL ACCESSORIES FOR SUPERLIFT 55/XC AND 45/XC SERIES	28

ELECTRO-HYDRAULIC TWO POST LIFTS



5500



P2C 255C

Main features:

- Capacity: 5.500 kg.
- Possibility of installation in symmetrical or asymmetric version.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column top.
- Standard height of two-post connection: 4.050 mm.
- Single motor.
- Electro magnet safety release 24V.
- Three-stage symmetric arms with pads adjustable in height and extensions supplied as standard.
- Anticrushing safety bar as standard.
- Minimum lifting height: 100 mm.
- Maximum lifting height: 2.080 mm

Also available versions (with optional column extension set):

- V: High version specific for vans (Height of two-post connection: 4.620 mm).
- XV: Extra-above version specific for vans and very high vehicles (Height of two-post connection: 5.220 mm).

P2C 255C


All models supplied with:
- 1 Operator's manual.



PN	Power supply	Description
0-43107700 /26 -/48 *	400V/3Ph/50-60Hz	P2C 255C - Blu RAL 5015 Orange peel - Capacity 5.500 kg.
0-43107702 /26 -/48 *	230V/1Ph/50Hz	P2C 255C - Blu RAL 5015 Orange peel - Capacity 5.500 kg.
0-43107703 /26 -/48 *	230V/1Ph/60Hz	P2C 255C - Blu RAL 5015 Orange peel - Capacity 5.500 kg.
8-43200216		Customization kit for P2C 255C (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.



 : New or Modified Item

4

- Compatible accessory supplied as STANDARD.
- Compatible accessory supplied on REQUEST.

Export - May 2024

ELECTRO-HYDRAULIC TWO POST LIFTS



4500



P2C 245C

Main features:

- Capacity: 4.500 kg.
- Possibility of installation in symmetrical or asymmetric version.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column top.
- Standard height of two-post connection: 4.050 mm.
- Single motor.
- Electro magnet safety release 24V.
- Three-stage symmetric arms with pads adjustable in height and extensions supplied as standard.
- Anticrushing safety bar as standard.
- Minimum lifting height: 100 mm.
- Maximum lifting height: 2.080 mm

Also available versions (with optional column extension set):

- V: High version specific for vans (Height of two-post connection: 4.620 mm).
- XV: Extra-above version specific for vans and very high vehicles (Height of two-post connection: 5.220 mm).

P2C 245C

All models supplied with:
- 1 Operator's manual.




PN	Power supply	Description
0-43107800 /26 -/48 *	400V/3Ph/50-60Hz	P2C 245C - Blu RAL 5015 Orange peel - Capacity 4.500 kg.
0-43107802 /26 -/48 *	230V/1Ph/50Hz	P2C 245C - Blu RAL 5015 Orange peel - Capacity 4.500 kg.
0-43107803 /26 -/48 *	230V/1Ph/60Hz	P2C 245C - Blu RAL 5015 Orange peel - Capacity 4.500 kg.
8-43200217		Customization kit for P2C 245C (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.





 : New or Modified Item

COMPULSORY ACCESSORIES FOR P2C 255C - P2C 245C

Picture	Description	PN
	Set of masonry screws (16 pcs.) For all models in the range	8-43100161

OPTIONAL ACCESSORIES FOR P2C 255C - P2C 245C

Picture	Description	PN
	Column extension set L = 570 mm - (H = 4.620 mm)*. Column extension set L = 1.170 mm - (H = 5.220 mm)*.	8-43100224/26 -/48 8-43100225/26 -/48
	Manual emergency descent pump.	8-43100205

ELECTRO-HYDRAULIC TWO POST LIFTS



P2C 245C B



Main features:

- Capacity: 4.500 kg.
- Single motor.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column base.
- Three-stage asymmetric arms with pads adjustable in height and extensions supplied as standard.
- Minimum lifting height: 95 mm.
- Maximum lifting height: 1.945 mm

P2C 245C B

All models supplied with:
- 1 Operator's manual.



PN	Power supply	Description
0-43107400/48 *	400V/3Ph/50-60Hz	P2C 245C B - Grey RAL 7040 Orange peel - Capacity 4.500 kg.
0-43107402/48 *	230V/1Ph/50Hz	P2C 245C B - Grey RAL 7040 Orange peel - Capacity 4.500 kg.
0-43107403/48 *	230V/1Ph/60Hz	P2C 245C B - Grey RAL 7040 Orange peel - Capacity 4.500 kg.
8-43200214		Customization kit for P2C 245C B (Compulsory)



: New or Modified Item

*: Other colors than the standard are NOT currently provided

7


- Compatible accessory supplied as STANDARD.
- Compatible accessory supplied on REQUEST.

Export - May 2024

ELECTRO-HYDRAULIC TWO POST LIFTS



3500



P2C 235C B

Main features:

- Capacity: 4.500 kg.
- Single motor.
- Lifting system: with hydraulic cylinders and synchronisation with wire ropes on the column base.
- Three-stage asymmetric arms with pads adjustable in height and extensions supplied as standard.
- Minimum lifting height: 95 mm.
- Maximum lifting height: 1.945 mm




All models supplied with:
- 1 Operator's manual.

P2C 235C B


PN	Power supply	Description
0-43107500/48 *	400V/3Ph/50-60Hz	P2C 235C B - Grey RAL 7040 Orange peel - Capacity 3.500 kg.
0-43107502/48 *	230V/1Ph/50Hz	P2C 235C B - Grey RAL 7040 Orange peel - Capacity 3.500 kg.
0-43107503/48 *	230V/1Ph/60Hz	P2C 235C B - Grey RAL 7040 Orange peel - Capacity 3.500 kg.
8-43200212		Customization kit for P2C 235C B (Compulsory)

*: Other colors than the standard are NOT currently provided





 : New or Modified Item

COMPULSORY ACCESSORIES FOR P2C 245C B - P2C 235C B

Picture	Description	PN
	<p>Set of masonry screws (10 pcs.) For all models in the range</p>	8-43100233

OPTIONAL ACCESSORIES FOR P2C 245C B - P2C 235C B

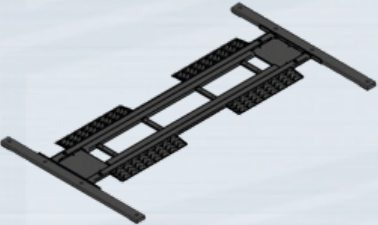
Picture	Description	PN
	<p>Main frame kit RAL7016 (To be order in case of location with critical floors).</p>	8-43100222
	<p>Manual emergency descent pump.</p>	8-43100205

ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS



SUPERLIFT 36-1XC B

3600

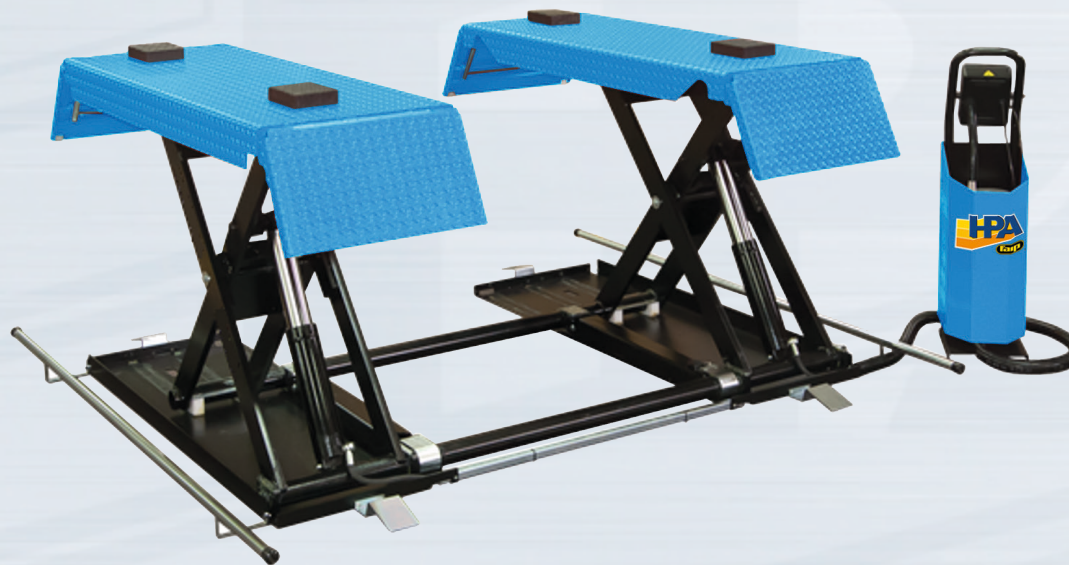


Main features:

- Capacity: 3.600 kg.
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways by 2 anti-torsion connection bars.
- Built-in ascent and descent ramps to the runways.
- Automatic engagement of mechanical safety locks with pneumatic release system.
- Equipped with anti-crushing foot guard.
- Low voltage control unit with «dead-man» control system.
- Low profile configuration for on-floor installations.
- Runboard height from ground: 115 mm.
- Max. lifting height: 1000 mm.
- Runboard length: 2.040 (open ramps)

SUPERLIFT 36-1XC B


- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



PN	Power supply	Description
0-41106600/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 36-1XC B - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106602/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 36-1XC B - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106603/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 36-1XC B - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
8-41200195		Customization kit SUPERLIFT 36-1XC B (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.




 : New or Modified Item

ELECTRO-HYDRAULIC UNDERBODY SCISSORS TYPE LIFTS



SUPERLIFT 32-1XC B

3200

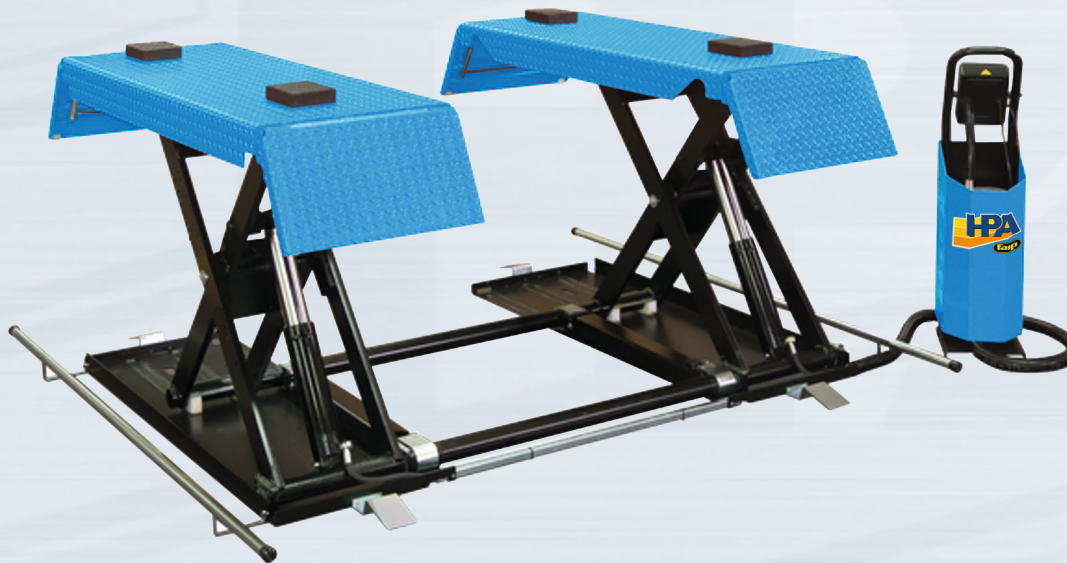


Main features:

- Capacity: 3.200 kg.
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways by 2 anti-torsion connection bars.
- Built-in ascent and descent ramps to the runways.
- Automatic engagement of mechanical safety locks with pneumatic release system.
- Equipped with anti-crushing foot guard.
- Low voltage control unit with «dead-man» control system.
- Low profile configuration for on-floor installations.
- Runboard height from ground: 115 mm.
- Max. lifting height: 1000 mm.
- Runboard length: 2.040 (open ramps)

SUPERLIFT 32-1XC B

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual




PN	Power supply	Description
0-41106500/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 32-1XC B - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
0-41106502/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 32-1XC B - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
0-41106503/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 32-1XC B - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
8-41200194		Customization kit SUPERLIFT 32-1XC B (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.






: New or Modified Item


COMPULSORY ACCESSORIES FOR SUPERLIFT 36-1XC B - 32-1XC B

Picture	Description	PN	
	<p>Set of masonry screws (8 pcs.) For all models in the range.</p>	8-41100203	

OPTIONAL ACCESSORIES FOR SUPERLIFT 36-1XC B - 32-1XC B

Picture	Description	PN	
	<p>M320 Moving wheel set for mobile version. Available for model SUPERLIFT 32-1XC B only.</p> <p>NOTE: The lift with the mounted accessory is downgraded to 3000 kg. And is not reversible</p>	8-41100320	
	<p>Crossbar set (2 bars and 4 pads), L=1800 mm.</p>	8-42300047	
	<p>Pad set (4 pcs.) H = 80 mm.</p>	8-42300027	

OPTIONAL ACCESSORIES FOR SUPERLIFT 36-1XC B - 32-1XC B

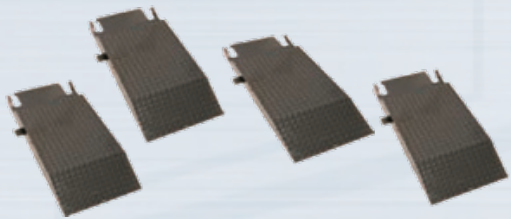Picture	Description	PN	
	<p>Long ramps for vehicles with spoiler having length 1.200 mm (4 pcs).</p>	<p>8-44600003</p>	

LOW PROFILE DOUBLE SCISSORS LIFTS



SUPERLIFT 32-2XC EF


3200



Main features:

- Capacity: 3.200 kg.
- Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks.
- Runboards version with flaps (F)

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual




SUPERLIFT 32-2XC EF

PN	Power supply	Description
0-41106000/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 32-2XC EF - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
0-41106002/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 32-1XC B - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
0-41106003/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 32-1XC B - Blue RAL 5015 Orange peel - Capacity 3.200 kg.
8-41200189		Customization kit SUPERLIFT 32-2XC EF (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.



 : New or Modified Item

LOW PROFILE DOUBLE SCISSORS LIFTS



SUPERLIFT 36-2XC EF

3600




Main features:

- Capacity: 3.600 kg.
- Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks.
- Runboards version with flaps (F).



- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 36-2XC EF


PN	Power supply	Description
0-41106100/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 36-2XC EF - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106102/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 36-2XC EF - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106103/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 36-2XC EF - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
8-41200190		Customization kit SUPERLIFT 36-2XC EF (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.






 : New or Modified Item






COMPULSORY ACCESSORIES FOR SUPERLIFT 32-2XC EF - 36-2XC EF

Picture	Description	PN
	Set of masonry screws (8 pcs.) For all models in the range.	8-41100203

OPTIONAL ACCESSORIES FOR SUPERLIFT 32-2XC EF - 36-2XC EF

Picture	Description	PN
	Crossbar set (2 bars and 4 pads), L=1800 mm.	8-42300047
	Flush installation frame set (galvanized) for C-line underbody low profile double scissor lifts with flaps (must be combined with 8-41100165)	8-41100225
	Set of long ramps for on-floor version	8-41100207

OPTIONAL ACCESSORIES FOR SUPERLIFT 32-2XC EF - 36-2XC EF

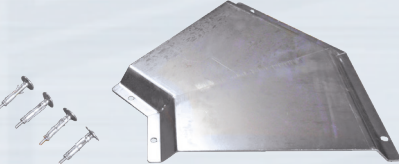Picture	Description	PN	
	<p>Extensions for pipes and cables L= 1 mt. (protection covers included.)</p>	8-41100184	
	<p>Extensions for pipes and cables L= 2 mt. (protection covers included.)</p>	8-41100185	
	<p>Pad set (4 pcs.) H= 80 mm.</p>	8-42300027	
	<p>Angle pipe protection cover</p>	8-41100143	
	<p>In-pit installation kit for lifts with flaps, incl. support for flaps that must be bolted to the ground - mandatory for recessed installation</p>	8-41100165	

HIGH PROFILE DOUBLE SCISSORS LIFTS




SUPERLIFT 36-2STC E

3600




Main features:

- Capacity: 3.600 kg.
- Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks.

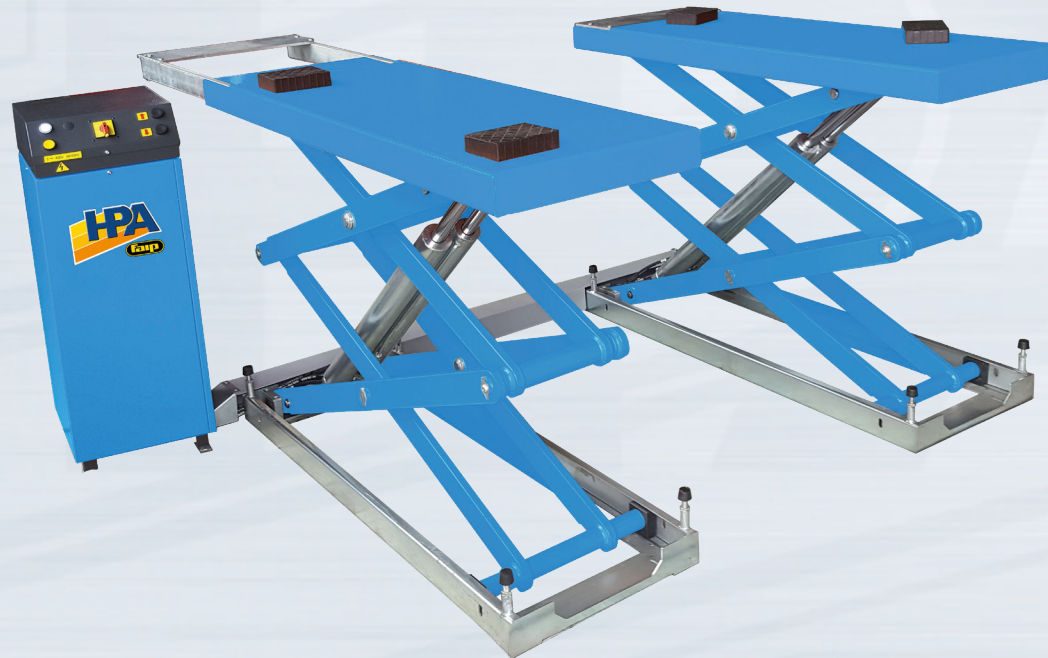

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 36-2STC E

PN	Power supply	Description
0-41106300/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 36-2STC E - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106302/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 36-2STC E - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
0-41106303/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 36-2STC E - Blue RAL 5015 Orange peel - Capacity 3.600 kg.
8-41200192		Customization kit SUPERLIFT 36-2STC E (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.



: New or Modified Item

- Compatible accessory supplied as STANDARD.
- Compatible accessory supplied on REQUEST.

HIGH PROFILE DOUBLE SCISSORS LIFTS




SUPERLIFT 40-2STC E

4000




Main features:

- Capacity: 4.000 kg.
- Alignment of the runways with a dual MASTER/SLAVE circuit without mechanical safety racks.

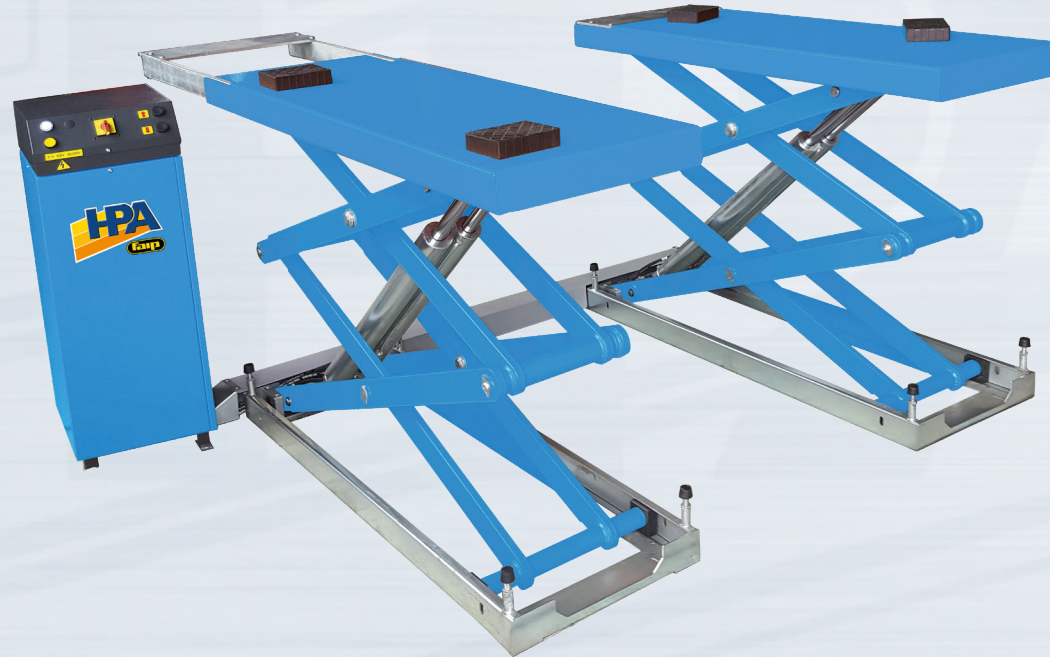

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 40-2STC E


PN	Power supply	Description
0-41106400/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 40-2STC E - Blue RAL 5015 Orange peel - Capacity 4.000 kg.
0-41106402/26 -/48 *	230V/1Ph/50Hz	SUPERLIFT 40-2STC E - Blue RAL 5015 Orange peel - Capacity 4.000 kg.
0-41106403/26 -/48 *	230V/1Ph/60Hz	SUPERLIFT 40-2STC E - Blue RAL 5015 Orange peel - Capacity 4.000 kg.
8-41200193		Customization kit SUPERLIFT 40-2STC E (Compulsory)

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.






: New or Modified Item



COMPULSORY ACCESSORIES FOR SUPERLIFT 36-2STC E - 40-2STC E

Picture	Description	PN
	Set of masonry screws (8 pcs.) For all models in the range.	8-41100203

OPTIONAL ACCESSORIES FOR SUPERLIFT 36-2STC E - 40-2STC E

Picture	Description	PN
	Crossbar set (2 bars and 4 pads), L=1800 mm.	8-42300047
	Flush installation frame set (2 pcs) for lifts with 3.6 t capacity	8-41100204
	Flush installation frame set (2 pcs) for lifts with 4.0 t capacity	8-41100171
	Extensions for pipes and cables L= 1 mt. (protection covers included.)	8-41100184

OPTIONAL ACCESSORIES FOR SUPERLIFT 36-2STC E - 40-2STC E

Picture	Description	PN	
	<p>Extensions for pipes and cables L= 2 mt. (protection covers included.)</p>	8-41100185	
	<p>Pad set (4 pcs.) H = 80 mm.</p>	8-42300027	

LOW PROFILE PLATFORM SCISSORS LIFTS



SUPERLIFT 55/XC CT LT

5500




Main features:

- Capacity: 5.500 kg
- Low profile platform scissor lift with lifting table for wheel alignment.
- Automatic runway levelling system with master/slave hydraulic circuit.
- Runway length: 4600 mm - 5200 mm



All models supplied with:
-1 Set of 4 hard rubber blocks.
-1 Operator's manual



DELIVERY AVAILABLE FROM CHINA ONLY

SUPERLIFT 55/XC CT LT

PN	Power supply	Description
0-42116000/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT LT , with LT lift table, runway length 4600 mm
8-42200163		Customization kit SUPERLIFT 55/XC CT LT, compulsory
0-42116010/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT LT I , with LT lift table, runway length 4600 mm, in-pit installation
8-42200223		Customization kit - SUPERLIFT 55/XC CT LT I, compulsory
0-42116500/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT LT , with LT lift table, runway length 5200 mm
8-42200219		Customization kit - SUPERLIFT 55/XC CT LT, compulsory
0-42116510/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT LT I , with LT lift table, runway length 5200 mm, in-pit installation
8-42200224		Customization kit - SUPERLIFT 55/XC CT LT I, compulsory

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.



: New or Modified Item

LOW PROFILE PLATFORM SCISSORS LIFTS



SUPERLIFT 55/XC CT

5500




- Main features:
- Capacity: 5.500 kg
 - Low profile platform scissor lift for wheel alignment.
 - Automatic runway levelling system with master/slave hydraulic circuit.
 - Runway length: 4600 mm 5200 mm



DELIVERY AVAILABLE FROM CHINA ONLY

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 55/XC CT

PN	Power supply	Description
0-42112100/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 55/XC CT , runway length 4600 mm
8-42200164		Customization kit SUPERLIFT 55/XC CT (Compulsory)
0-42112110/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT I , runway length 4600 mm, in-pit installation
8-42200226		Customization kit - SUPERLIFT 55/XC CT I, compulsory
0-42116600/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT , runway length 5200 mm
8-42200220		Customization kit - SUPERLIFT 55/XC CT, compulsory
0-42116610/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC CT I , runway length 5200 mm, in-pit installation
8-42200227		Customization kit - SUPERLIFT 55/XC CT I, compulsory

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.



: New or Modified Item

LOW PROFILE PLATFORM SCISSORS LIFTS



5500




SUPERLIFT 55/XC

Main features:

- Capacity: 5.500 kg
- Low profile platform scissor lift for service/inspection.
- Automatic runway levelling system with master/slave hydraulic circuit.
- Runway length: 4600 mm - 5200 mm



All models supplied with:
 -1 Set of 4 hard rubber blocks.
 -1 Operator's manual



DELIVERY AVAILABLE FROM CHINA ONLY

SUPERLIFT 55/XC

PN	Power supply	Description
0-42112300/26 -/48 *	230V/400V/3Ph/50/60Hz	SUPERLIFT 55/XC , runway length 4600 mm
8-42200166		Customization kit SUPERLIFT 55/XC (Compulsory)
0-42112310/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC I , runway length 4600 mm, in-pit installation
8-42200229		Customization kit - SUPERLIFT 55/XC I, compulsory
0-42116800/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC , runway length 5200 mm
8-42200221		Customization kit - SUPERLIFT 55/XC, compulsory
0-42116810/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 55/XC I , runway length 5200 mm, in-pit installation
8-42200230		Customization kit - SUPERLIFT 55/XC I, compulsory



: New or Modified Item

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.

LOW PROFILE PLATFORM SCISSORS LIFTS



SUPERLIFT 45/XC CT LT

4500




Main features:

- Capacity: 4.500 kg
- Low profile platform scissor lift with lifting table for wheel alignment.
- Automatic runway levelling system with master/slave hydraulic circuit.
- Runway length: 4200 mm



DELIVERY AVAILABLE FROM CHINA ONLY


- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 45/XC CT LT

PN	Power supply	Description
0-42116100/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC CT LT , with LT lift table, runway length 4200 mm
8-42200167		Customization kit - SUPERLIFT 45/XC CT LT, compulsory
0-42116110/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC CT LT I , with LT lift table, runway length 4200 mm, in-pit installation
8-42200222		Customization kit - SUPERLIFT 45/XC CT LT I, compulsory



 : New or Modified Item

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.

- Compatible accessory supplied as STANDARD.
- Compatible accessory supplied on REQUEST.

LOW PROFILE PLATFORM SCISSORS LIFTS



SUPERLIFT 45/XC CT

4500




Main features:

- Capacity: 4.500 kg
- Low profile platform scissor lift for wheel alignment.
- Automatic runway levelling system with master/slave hydraulic circuit.
- Runway length: 4200 mm



DELIVERY AVAILABLE FROM CHINA ONLY

- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 45/XC CT

PN	Power supply	Description
0-42116200/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC CT , runway length 4200 mm
8-42200168		Customization kit - SUPERLIFT 45/XC CT, compulsory
0-42116210/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC CT I , runway length 4200 mm, in-pit installation
8-42200225		Customization kit - SUPERLIFT 45/XC CT I, compulsory



: New or Modified Item

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.

LOW PROFILE PLATFORM SCISSORS LIFTS



SUPERLIFT 45/XC

4500




- Main features:
- Capacity: 4.500 kg
 - Low profile platform scissor lift for service/inspection.
 - Automatic runway levelling system with master/slave hydraulic circuit.
 - Runway length: 4200 mm



DELIVERY AVAILABLE FROM CHINA ONLY


- All models supplied with:
- 1 Set of 4 hard rubber blocks.
 - 1 Operator's manual



SUPERLIFT 45/XC






PN	Power supply	Description
0-42116400/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC , runway length 4200 mm
8-42200170		Customization kit - SUPERLIFT 45/XC, compulsory
0-42116410/26 -/48 *	230-400V/3Ph/50-60Hz	SUPERLIFT 45/XC I , runway length 4200 mm, in-pit installation
8-42200228		Customization kit - SUPERLIFT 45/XC I, compulsory





 : New or Modified Item

*: Due to possible stock or supply problems, as an alternative to Blue RAL5015, the neutral grey color RAL7040 may be available.

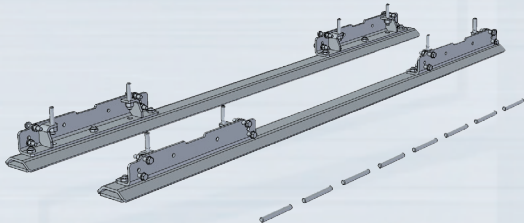OPTIONAL ACCESSORIES FOR SUPERLIFT 55/XC AND 45/XC SERIES

Picture	Description	PN
	Set of cross bars , to be ordered with the lift, compulsory for usage of 2 jacking beams, recommended for wheel alignment, standard colour grey RAL 7016 fixed	8-42100218
	Crossbar set (2 bars and 4 pads), L=1800 mm.	8-42300047
	Pad set (4 pcs.) H = 80 mm.	8-42300027
	Complete low-voltage lighting kit.	8-42100185
	Extensions for pipes = 2 mt (for lifts with LT)	8-42100183
	Extensions for pipes = 4 mt (for lifts with LT)	8-42100184
	Extensions for pipes = 2 mt (for lifts without LT)	8-42100173
	Extensions for pipes = 4 mt (for lifts without LT)	8-42100174

OPTIONAL ACCESSORIES FOR SUPERLIFT 55/XC AND 45/XC SERIES

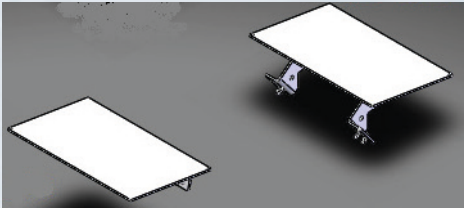Picture	Description	PN	
	<p>Scissor Jack 2,2 ton. Gray Ral 7016</p>	<p>J804-0000000</p>	
	<p>Transformation kit from surface-mounted to recessed installation</p>	<p>8-42100234/00</p>	



**COMPANY WITH
CERTIFIED
QUALITY SYSTEM
- ISO 9001-**

